

03500.017903

PATENT APPLICATION



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Reply Application of:)	
	:	Examiner: Ryan D. Walsh
Hideo NANATAKI, et al.)	
	:	Group Art Unit: 2852
Application No.: 10/776,380)	
	:	Confirmation No.: 3935
Filed: February 12, 2004)	
	:	
For: HEATING APPARATUS)	December 7, 2005

Mail Stop Amendment

Commissioner for Patents
Post Office Box 1450
Alexandria, VA 22313-1450

SUBMISSION OF ENGLISH TRANSLATION OF PRIORITY DOCUMENT
AND
DECLARATION


Sir:

Enclosed herewith is a certified translation of Japanese Patent Application No. 2003-039967, filed February 18, 2003, from which application the above-identified application claims priority under 35 U.S.C. § 119. Also enclosed is a Declaration stating that the attached pages contain a correct English translation of the priority document, i.e., Japanese Patent Document No. 2003-039967, filed February 18, 2003. See Manual of Patent Examining Procedure, Section 201.15, Rev. 2, May 2004, pp. 200-91 and 92.

Favorable consideration hereof is earnestly solicited.

Applicants' undersigned attorney may be reached in our Washington, D.C. office by telephone at (202) 530-1010. All correspondence should continue to be directed to our below-listed address.

Respectfully submitted,



Attorney for Applicants

William M. Wannisky

Registration No. 28,373

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200

WMW:tas

DC_MAIN 223744v1



DECLARATION

I, TAKAO MATSUI, a Japanese Patent Attorney registered No.12006, of Okabe International Patent Office at No. 602, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo, Japan, hereby declare that I have a thorough knowledge of Japanese and English languages, and that the attached pages contain a correct translation into English of the priority documents of Japanese Patent Application No. 2003-039967 filed on February 18, 2003 in the name of CANON KABUSHIKI KAISHA.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made, are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

signed this 7th day of December, 2005



Takao Matsui

PATENT OFFICE
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy of the following application
as filed with this Office.

Date of Application: February 18, 2003

Application Number: Japanese Patent Application
No. 2003-039967

Applicant(s): CANON KABUSHIKI KAISHA

March 8, 2004

Commissioner,
Patent Office

YASUO IMAI (Seal)

Certificate No. 2004-3017681

2003-039967

[Name of the document] Patent Application

[Reference No.] 251535

[Date] February 18, 2003

[Addressed to] Commissioner, Patent Office

[International Classification] G03G 15/20 102
G03G 15/00 102

[Title of the Invention] HEATING APPARATUS

[Number of the Claims] 1

[Inventor]

[Domicile or Residence] c/o Canon Kabushiki Kaisha
3-30-2, Shimomaruko, Ohta-ku,
Tokyo

[Name] HIDEO NANATAKI

[Inventor]

[Domicile or Residence] c/o Canon Kabushiki Kaisha
3-30-2, Shimomaruko, Ohta-ku,
Tokyo

[Name] YOZO HOTTA

[Inventor]

[Domicile or Residence] c/o Canon Kabushiki Kaisha
3-30-2, Shimomaruko, Ohta-ku,
Tokyo

[Name] TAKU FUKITA

[Applicant]

[Identification No.] 000001007

[Name] CANON KABUSHIKI KAISHA

[Representative] FUJIO MITARAI

[Attorney]

[Identification No.] 100086818

[Patent Attorney]

[Name] YUKIO TAKANASHI

[Indication of Official Fee]

[Prepayment Ledger No.] 009623

[Amount] 21000

[List of Filed Materials]

[Material] Specification 1

[Material] Drawings 1

[Material] Abstract 1

[General Power of Attorney] 9703877

[Proof Requirement] Required

[Name of the Document] Specification

[Title of the Invention] HEATING APPARATUS

[What is claimed is]

5 [Claim 1]

A heating apparatus for heating a material to be heated, the material being inserted in a nip to be nipped and conveyed therein using heat of a rotary member, comprising: a rotary member; an opposing
10 member forming a nip with respect to said rotary member; a heating member for heating another portion other than the nip in a surface of said rotary member; and temperature control means for controlling a temperature of the rotary member heated by said
15 heating member, wherein after insertion of the material to be heated in the nip starts, the temperature control means raises a control temperature of said heating member before the completion of one revolution of rotary member.

20 [Detailed Description of the Invention]

[0001]

[Technical Field of the Invention]

The present invention relates to a heating apparatus which is preferably used as a fixing
25 apparatus of an image forming apparatus such as a copying machine or a printer. The fixing apparatus heats a recording material, on which a toner image

made of a heat-softening resin is formed and carried, to form a permanently-fixed image on the recording material.

[0002]

5 More particularly, the present invention relates to a heating apparatus of a type for heating a surface of a rotary member for heating the heating material (the material to be heated), the apparatus including: the rotary member for heating the heating
10 material; an opposing member that forms a nip with respect to the rotary member; a heating member for heating a portion of a rotary member surface other than the nip; and temperature control means for controlling temperature used for heating the rotary
15 member by the heating member, in which the heating material inserted in the nip to be nipped and conveyed therein using heat of the rotary member. The present invention also relates to an image forming apparatus including the heating apparatus as
20 a fixing apparatus.

[0003]

[Prior Art]

For convenience, description will be made taking as an example an image forming apparatus such
25 as an electrophotographic copying machine, a printer, or a fax machine.

[0004]

A fixing apparatus of an image forming apparatus is used for a process of heat-fixing an unfixed toner image to a surface of a recording material as a permanently-fixed image. The unfixed
5 toner image is obtained in an image forming part of the image forming apparatus appropriately by means of an image forming process such as electrophotography, electrostatic recording, or magnetic recording. The unfixed toner image is formed on the surface of the
10 recording material by using toner (a visualizing agent) composed of a heat-fusing resin or the like in a direct method or an indirect (transferring) method.
[0005]

Up to now, examples of the fixing apparatus
15 include a heating roller type and a film heating type.
[0006]

The heating roller type employs a heating apparatus that heat-fixes an unfixed toner image to a surface of a recording material by including: a
20 fixing roller (heating roller) and a pressure roller, which compose a rotating roller pair; a heat source such as a halogen lamp built within the fixing roller so as to heat a portion to or control its temperature at a predetermined fixing temperature; and a press-
25 contact nip portion (fixing nip portion) between the rotating roller pair through which the recording material as a heating material (a material to be

heated), on which the unfixed toner image is formed and carried, is introduced, nipped, and conveyed.

[0007]

The film heating type employs a heating apparatus that includes: a film having a small heat capacity instead of the heating roller so as to nip and convey a recording material between the film and the pressure roller; and a heater disposed to an inner surface of the film so as to heat the recording material. The film heating type increases the temperature for a short period of time, and is thus utilized as an on-demand fixing apparatus.

[0008]

On the other hand, if the fixing roller or the film is coated with a resilient layer made of rubber or the like, the resilient layer functions as a heat insulating layer against the heating from the inside. Therefore, it takes longer even for the film heating type to increase the temperature, making it difficult to secure on-demand.

[0009]

In the case of coating a surface of a rotary member for heating a recording material as a heating material with a resilient layer, a releasing layer, or the like having heat insulating property, there is proposed an apparatus of a surface-heating type in which heat is supplied from a surface side of the

rotary member (refer to, for example, patent document 1). According to the apparatus of the surface-heating type, heat can be supplied from the surface of the rotary member for heating, improving
5 responsiveness to power supply to a heater as a heating source. Even in the case of using the rotary member coated with the resilient layer, it is possible to reduce rising time.

[Patent Document 1]

10 Japanese Patent Application Laid-Open No. H10-133505

[0010]

[Problems to be solved by the Invention]

However, in the apparatus of the surface-
15 heating type, the rotary member has a temperature gradient that decreases from its surface to its deep part. Thus, even if the surface of the rotary member is deprived of heat due to insertion of the recording material as a heating material, there is little heat
20 to be supplied from the inside of the rotary member. As a result, the amount of heat to be supplied to the recording material from the rotary member having a large amount of stored heat in the first revolution is different from that in the second revolution or
- 25 later, causing a problem in that an uneven gloss (gloss non-uniformity) occurs due to uneven heating.

[0011]

The above circumstances have created a demand for a fixing apparatus with reduced rising time and without an image defect such as an uneven gloss occurring due to uneven heating.

5 [0012]

The present invention is therefore to provide a fixing apparatus of a surface-heating type which can meet the above-mentioned demand.

[0013]

10 [Means for solving the Problems]

According to the present invention, there is provided a heating apparatus for heating a heating material inserted in a nip to be nipped and conveyed therein using heat of a rotary member, including: the
15 rotary member; an opposing member that forms the nip with respect to the rotary member; a heating member for heating another portion other than the nip in a surface of said rotary member; and temperature control means for controlling a temperature of the
20 rotary member heated by said heating member, in which after insertion of the heating material in the nip starts, the temperature control means raises a control temperature of said heating member before the completion of one revolution of rotary member.

25 [0014]

<Operation>

Namely, as for the rotary member that receives

heat supply of a surface-heating type by the heating member in a portion of the rotary member surface other than the nip for heating the inserted heating material, after the insertion of the heating material in the nip starts, the control temperature of the heating member for heating the rotary member is increased before the rotary member rotates by one revolution. Accordingly, heat supplying capacity of the rotary member with respect to the heating material can be maintained constant.

[0015]

The control temperature of the heating member is decreased before the discharging of the heating material from the nip completes, that is, the control temperature of the heating member is recovered before discharging the heating material. Accordingly, while the heating material is not inserted, the temperature of the rotary member can be prevented from increasing.

[0016]

According to the above actions, there can be provided an image forming apparatus in which image non-uniformity such as uneven gloss is not generated even if the heating apparatus is used as an energy-saving fixing apparatus with shorter rising time.

[0017]

[Embodiments of the Invention]

<First Embodiment; Figs 1 to 6, 11 and 12>

(1) Example of image forming apparatus

Fig. 2 is a structural diagram showing an outline of an example of an image forming apparatus. As the image forming apparatus of this embodiment, a
5 full-color electrophotographic printer is used, which is an apparatus using a center reference for passing paper with the widthwise center of a recording material aligned with the lengthwise center of the image forming apparatus.

10 [0018]

Numerical 11 denotes a photosensitive drum (image bearing member) of an electrophotographic process which is composed of an organic photosensitive member. The photosensitive drum 11 is driven to rotate
15 clockwise as indicated by an arrow at a predetermined process speed (peripheral speed) $V (= 120 \text{ mm/sec})$.

[0019]

During the rotation drive process, the photosensitive drum 11 is uniformly charged to a
20 predetermined polarity and potential by a charging device 12 such as a charging roller.

[0020]

The charged surface of the photosensitive drum 11 of an electrophotographic type then undergoes
25 scanning and exposure based on target image information by laser light 13a outputted from a laser optical box (laser scanner) 13. The laser optical

box 13 outputs the laser light 13a modulated (turned on or off) corresponding to time series electrical digital pixel signals of the target image information from an image signal generating apparatus (not shown) such as a computer, and subjects a photosensitive drum surface to scanning and exposure. As a result of the scanning and exposure, an electrostatic latent image corresponding to the target image information used for the scanning and exposure is formed on the photosensitive drum 11 surface. Numeral 13b denotes a mirror for reflecting the laser light 13a outputted from the laser optical box 13 to an exposure position on the photosensitive drum 11.

[0021]

15 In the case of forming a full-color image, the scanning and exposure and the forming of a latent image are performed on a first color separation component image, for example, a yellow component image, of a target full-color image, and the latent image is developed as a yellow toner image by the action of a yellow developing device 14Y among four-color developing devices 14. The yellow toner image is transferred onto a surface of an intermediate transfer drum 16 at a primary transfer portion T1 that is a contact portion (or proximate portion) between the photosensitive drum 11 and the intermediate transfer drum 16. The photosensitive

drum 11 surface that has undergone the transfer of the toner image onto the intermediate transfer drum 16 surface is cleaned by a cleaner 17 that removes adhesion residuals such as untransferred toner therefrom.

[0022]

The above process cycle including charging, scanning and exposure, development, primary transfer, and cleaning is sequentially executed for respective color separation component images of the target full-color image, that is, a second color separation component image (for example, magenta component image by the action of a magenta developing device 14M), a third color separation component image (for example, cyan component image by the action of a cyan developing device 14C), and a fourth color separation component image (for example, black component image by the action of a black developing device 14BK). Then, four-color toner images in total, that is, the yellow toner image, a magenta toner image, a cyan toner image, and a black toner image, are sequentially transferred onto the intermediate transfer drum 16 surface. Thus, the four-color toner images are composited to form a color image corresponding to the target full-color image.

[0023]

The intermediate transfer drum 16 has a medium-

resistivity resilient layer and a high-resistivity surface layer on a metal drum. The intermediate transfer drum 16 is driven to rotate counterclockwise as indicated by an arrow at approximately the same peripheral speed as the photosensitive drum 11 while being in contact with or proximate to the photosensitive drum 11. The metal drum is applied with a bias potential to produce a potential difference with respect to the photosensitive drum 11 so as to transfer the toner image on the photosensitive drum 11 side onto the intermediate transfer drum 16 surface side.

[0024]

In a secondary transfer portion T2 that is a contact nip between the intermediate transfer drum 16 and a transfer roller 15, the composite color toner image on the intermediate transfer drum 16 surface is transferred onto a recording material P that has been sent out to the secondary transfer portion T2 from a paper feeding part (not shown) at a predetermined timing. The transfer roller 15 supplies charges having the polarity opposite to the toner from a back surface of the recording material P to thereby collectively transfer the composite color toner image onto the recording material P side from the intermediate transfer drum 16 surface side continuously.

[0025]

The recording material P that has passed the secondary transfer portion T2 is separated from the intermediate transfer drum 16 surface, is introduced to a fixing apparatus 10, has an unfixed toner image heat-fixed, and is discharged to a discharge tray (not shown) outside the image forming apparatus as a material formed with a color image.

[0026]

Used as the fixing apparatus 10 is a heating apparatus according to the present invention. The fixing apparatus 10 will be described in detail in the next section (2).

[0027]

The intermediate transfer drum 16 that has undergone the transfer of the color toner image onto the recording material P is cleaned by a cleaner 18 that removes adhesion residuals such as untransferred toner and paper powder therefrom. The cleaner 18 is normally held without contact with the intermediate transfer drum 16. While the color toner image is being secondarily transferred from the intermediate transfer drum 16 onto the recording material P, the cleaner 18 is held in contact with the intermediate transfer drum 16.

[0028]

Meanwhile, before an image is formed in the

fourth color (BK), the transfer roller 15 is also held without contact with the intermediate transfer drum 16. While the color toner image is being secondarily transferred from the intermediate

5 transfer drum 16 onto the recording material P, the transfer roller 15 is held in contact with the intermediate transfer drum 16.

[0029]

Compared to such full-color image forming operation, during mono-color image forming operation, only the black developing device 14BK is operated without switching the developing devices. A next page image can be continuously formed on the intermediate transfer drum 16, and a series of image forming operation is performed while the transfer roller 15 and the cleaner 18 is in abutment with the intermediate transfer drum 14. Therefore, an image can be formed in the mono-color image forming about four times as fast as in the full-color image forming.

10 operation, during mono-color image forming operation, only the black developing device 14BK is operated without switching the developing devices. A next page image can be continuously formed on the intermediate transfer drum 16, and a series of image forming operation is performed while the transfer roller 15 and the cleaner 18 is in abutment with the intermediate transfer drum 14. Therefore, an image can be formed in the mono-color image forming about four times as fast as in the full-color image forming.

15 forming operation is performed while the transfer roller 15 and the cleaner 18 is in abutment with the intermediate transfer drum 14. Therefore, an image can be formed in the mono-color image forming about four times as fast as in the full-color image forming.

20 The recording speed according to this embodiment is 4 pages (A4 size) per minute in the full-color image forming and 16 pages per minute in the mono-color image forming.

[0030]

25 By repeating the above operation, the image forming can be continuously performed. Fig. 11 is an operation bar chart of the image forming apparatus.

[0031]

1) Multi pre-rotation step

A multi pre-rotation step corresponds to a starting (activating) operation period (warming
5 period) for the image forming apparatus. By turning on a main power switch of the image forming apparatus, a main motor of the image forming apparatus is activated to execute preparation operation for necessary process devices.

10 [0032]

2) Stand-by

After the predetermined starting operation period ends, drive of the main motor stops, and the image forming apparatus maintains a stand-by
15 (waiting) status until an input of a print job starting signal.

[0033]

3) Pre-rotation step

A pre-rotation step corresponds to a period
20 during which the main motor is driven again in response to the input of a print job starting signal and print job pre-operation for the necessary process devices is executed.

[0034]

25 More practically, the procedure is as follows in the stated order: (1) the image forming apparatus receives the print job starting signal, (2) a

formatter expands an image (expansion time varies depending on the amount of image data or the process speed of the formatter), and (3) the pre-rotation step starts.

5 [0035]

Note that in the case where the print job starting signal is inputted in the multi pre-rotation step of the above paragraph 1, the multi pre-rotation step is followed by the pre-rotation step, skipping
10 the stand-by of the above paragraph 2.

[0036]

4) Execution of print job

After the predetermined multi pre-rotation step ends, the image forming process is subsequently
15 executed and the image-formed recording material is outputted.

[0037]

In the case of continuous print jobs, the image forming process is repeated, thereby outputting a
20 predetermined number of sheets of the image-formed recording materials sequentially.

[0038]

5) Paper interval step

In the case of continuous print jobs, a paper
25 interval step is a step for the interval between a trailing edge of a recording material P and a leading edge of the next recording material P, and

corresponds to a period during which paper is not passing a transfer part or the fixing apparatus.

[0039]

5) Post-rotation step

5 A post-rotation step corresponds to a period for executing print job post-operation for the necessary process devices by continuously driving the main motor even after outputting the image-formed recording material (end of print job) in the case of
10 a print job for only one sheet, or even after outputting the last image-formed recording material for continuous print jobs (end of print job) in the case of the continuous print jobs.

[0040]

15 6) Stand-by

After the predetermined post-rotation step ends, drive of the main motor stops, and the image forming apparatus maintains a stand-by (waiting) status until an input of the next print job starting signal.

20 [0041]

(2) Fixing apparatus 10

Fig. 1 is a cross-sectional schematic diagram of the fixing apparatus 10. The fixing apparatus 10 is a heating apparatus of a surface-heating type
25 according to the present invention. The fixing apparatus 10 includes: a fixing roller 1 as a rotary member for heating the recording material P as a

heating material; a pressure roller 3 as an opposing member that forms a fixing nip N1 with respect to the fixing roller 1; a surface-heating unit 2 as a heating member for heating a surface of the fixing roller 1; and temperature control means 5, 100, and 101 for controlling temperature used for heating the fixing roller 1 by the surface-heating unit 2.

[0042]

The fixing roller 1 is a resilient roller with an outer diameter of 20 mm composed of a core metal 1a, a silicone rubber layer 1b with a thickness of 3 mm which coats an outer periphery of the core metal 1a, and a PFA resin 1c with a thickness of 50 μ m which coats an outer periphery of the silicone rubber layer 1b.

[0043]

Similarly, the pressure roller 3 is a resilient roller with an outer diameter of 20 mm composed of a core metal 3a, a silicone rubber layer 3b with a thickness of 3 mm which coats an outer periphery of the core metal 3a, and a PFA resin 3c with a thickness of 50 μ m which coats an outer periphery of the silicone rubber layer 3b. The pressure roller 3 is pressed onto the fixing roller 1 at a predetermined applied pressure (100 N) to form the fixing nip N1 as a nip portion for a heating material.

[0044]

The surface-heating unit 2 includes a ceramic heater 2b as heating means (heating source), a heater holder 2c that supports the ceramic heater 2b, a heating film 2a of an endless belt shape (cylindrical shape) externally fitted rotatably around the heater holder 2c, and a pressure stay 2d. The pressure stay 2d presses the heater holder 2c onto the fixing roller 1 against resilience of the silicone rubber layer 1b, and brings the ceramic heater 2b into press contact with the fixing roller 1 through the heating film 2a, thereby forming a heating nip N2.

[0045]

The heating film 2a has a peripheral length of 56.5 mm and is obtained by coating a surface of a polyimide (PI) resin of 40 μm in thickness with a PFA resin of 10 μm in thickness. The ceramic heater 2b has an output of 700 W and is obtained by printing a resister on alumina of 8 mm in width and 1 mm in thickness, the resister being protected by glass from above.

[0046]

The fixing roller 1 is driven to rotate clockwise as indicated by an arrow of Fig. 1 by driving means M. Simultaneously with the rotation drive of the fixing roller 1, the pressure roller 3 is rotated counterclockwise as indicated by an arrow due to friction within the fixing nip N1. At the

same time, the heating film 2a of the surface-heating unit 2 is rotated around an outer periphery of the heater holder 2c counterclockwise as indicated by an arrow due to friction within the heating nip N2 while
5 an inner side of the heating film 2a slides in close contact with a surface of the ceramic heater 2b.

[0047]

The ceramic heater 2b as the heating means of the surface-heating unit 2 increases temperature
10 rapidly by allowing power supply to an electrical-heat-generation resistive layer from the power supply circuit 101. The heat generation from the ceramic heater 2b causes the surface of rotating fixing roller 1 to be heated through the heating film 2a in
15 the heating nip N2.

[0048]

In this embodiment, the thermistor 5 as temperature detecting means is abutted against a back surface of the ceramic heater 2b. Based on a
20 temperature detected by the thermistor 5, the control circuit 100 as the temperature control means controls a state where power is supplied from the power supply circuit 101 to the ceramic heater 2b to control temperature so as to maintain the surface temperature
25 of the fixing roller 1 at a predetermined fixing temperature.

[0049]

In a state where: the fixing roller 1 is driven to rotate; the pressure roller 3 and the heating film 2a of the surface-heating unit 2 are rotated; and power is supplied to the ceramic heater 2b of the surface-heating unit 2 to heat and control the surface temperature of the fixing roller 1 to and at a predetermined fixing temperature, a recording material P bearing an unfixed toner image t as a heating material is introduced into the fixing nip N1 between the fixing roller 1 and the pressure roller 3. Then, the recording material P passes the fixing nip N1 along with the fixing roller 1 in close contact with an outer surface of the fixing roller 1. While passing the fixing nip N, the toner image t is heated by heat conduction from the fixing roller 1, thereby being subjected to heat-fixing of toner image. The recording material P that has passed the fixing nip N1 is separated from the outer surface of the fixing roller 1 on a recording material exit side, and further conveyed.

[0050]

(3) Temperature control

According to this embodiment, heat is supplied to the fixing roller 1 surface from the surface-heating unit 2, and the recording material P is heated by the heat supplied to the fixing roller 1. In order to follow up a change in the temperature of

the fixing roller 1 surface and have the temperature converge on a target temperature rapidly, the control circuit (CPU) 100 controls the state where the power is supplied to the ceramic heater 2b by PID control
5 (determining the next state by proportional/integral/derivative processes based on a change in past temperature over the elapse of time).
[0051]

Fig. 3 shows the control according to this
10 embodiment over the elapse of time, and indicates the target temperature and the power that is inputted to the ceramic heater 2b with the insertion of the recording material P in the fixing nip N1 set as a starting point.
15 [0052]

In this embodiment, in order to maintain constant the heat supplying capacity of the fixing roller 1 with respect to the recording material P, the target temperature is set at $T1 = 200^{\circ}\text{C}$ in the
20 first revolution, and changed to $T2 = 250^{\circ}\text{C}$ in the second revolution. The ceramic heater 2b and the heating film 2a according to this embodiment have an extremely small heat capacity, allowing an instantaneous increase in temperature of the heating
25 film 2a (with a stand-by temperature increase rate of approximately 80°C/sec). Therefore, the target temperature may be switched from $T1$ to $T2$ when a time

s1 (= L/V) elapsed after the insertion of the recording material P in the fixing roller 1. The time s1 is a time required for the fixing roller 1 to rotate by a distance (L = 40 mm) from the fixing nip N1 to the heating nip N2.

[0053]

Hereinbelow, description is made of operation of this embodiment along a flow chart of Fig. 12.

[0054]

10 1) At the start of printing, power supply to the ceramic heater 2b starts, and the temperature is controlled at the target temperature T1 based on the temperature detected by the thermistor 5.

[0055]

15 2) A timer s is initialized at the time point when the recording material P reaches the fixing nip N1, and the target temperature is switched over to T2 at the timing when the time s1 elapsed.

[0056]

20 3) In the case of continuous printing operation, to prepare for the next recording material, the target temperature is switched from T2 back to T1 a time s2 before the timing when the recording material P is discharged from the fixing nip N1. The time s2
25 is a time required for the fixing roller 1 to rotate by a distance from the heating nip N2 to the fixing nip N1. The operation prevents the fixing roller 1

from being overheated during the paper interval step.
[0057]

4) At the end of printing, power supply to a heater is turned off.

5 Note that the control circuit 100 performs the temperature control of Fig. 3 over the elapse of time by calculating the time point when a fed recording material P reaches the fixing nip N1 and is about to be inserted therein and the time point when the
10 recording material P is discharged from the fixing nip N1 based on information including the time point when the recording material P is fed, the time point when the recording material P is timing-fed by a registration roller, the conveying speed of the
15 recording material P, and the recording material size thereof.

[0058]

(4) Comparative example

Figs. 4 (a) to 4 (c) are model diagrams for
20 explaining the phenomena caused in this embodiment. Fig. 4 (a) shows a temperature distribution within a silicone rubber layer of a type that is heated from an inside of a fixing roller according to a conventional example. In order to obtain a
25 temperature T0 in a surface of the fixing roller (outside of rubber), a deep part of the rubber layer is maintained at a high temperature. It requires a

large amount of heat to reach such a state. Thus, it takes long to reach the temperature capable of fixing. Meanwhile, after heat is supplied to a recording material from the surface of the fixing roller, heat is constantly supplied from a high temperature region in the deep part. The state in the second revolution can be maintained similarly to that in the first revolution.

[0059]

10 Fig. 4 (b) shows the case of a comparative example in which a fixing apparatus of a surface-heating type is used to maintain the surface of the fixing roller 1 at a constant temperature T1 (180°C). Fig. 4 (b) also shows a change in a temperature distribution within the silicone rubber layer 1b in the case of inserting the recording material P in the fixing nip N1.

[0060]

20 During the first revolution of the fixing roller 1 after the insertion of the recording material P, heat is stored not only in the surface of the fixing roller 1 but also in its deep part and in the vicinity of its surface due to the heating before the insertion of the recording material P (during the paper interval step or the pre-rotation step), providing the fixing roller 1 with a high heat supplying capacity. On the other hand, within the

heating nip N2 in the second revolution or later,
only the vicinity of the surface of the fixing roller
1 is heated, increasing its temperature. However, in
the fixing nip N1, the fixing roller 1 undergoes
5 thermal relaxation (a phenomenon that temperature is
equalized due to thermal diffusion), and its actual
temperature is low. Thus, the heat supplying
capacity of the fixing roller 1 can be assumed to be
lowered.

10 [0061]

In such conditions, it is observed as shown in
Fig. 5 that the temperature of the discharged
recording material P decreases stepwise between the
time corresponding to the first revolution and the
15 time corresponding to the second revolution or later.
[0062]

Fig. 4 (c) is a model diagram showing a change
in the temperature distribution within the silicone
rubber layer 1b in the case of performing the
20 temperature control, which exhibits characteristics
of this embodiment.
[0063]

In this embodiment, the temperature control is
performed to change the surface temperature of the
25 fixing roller 1 from T1 in the first revolution with
a large amount of stored heat to T2 in the second
revolution or later with a small amount of stored

heat, so that the temperature distribution state after the thermal relaxation in the first revolution becomes the same as that in the second revolution or later. Thus, the heat supplying capacity is

5 maintained uniform.

[0064]

Accordingly, power is supplied to the ceramic heater 2b to control the temperature of the discharged recording material P so as to be almost

10 constant (at 90°C) as shown in Fig. 6.

[0065]

Measurement was performed on image glosses on recording materials outputted from the image forming apparatus according to the comparative example

15 relating to the change in the temperature distribution of Fig. 4 (b) and the image forming apparatus according to this embodiment, resulting in Table 1.

[0066]

20 [Table 1]

	Toner amount	Gloss	
		First revolution	Second revolution
Comparative Example	Bk mono-color	15	7
	2 colors (M+C)	25	10
This embodiment	Bk mono-color	15	15
	2 colors (M+C)	25	25

[0067]

In the fixing apparatus developing the stepwise temperature change such as in the comparative example,

a large gloss change is observed at the turn of the temperature change between the first revolution and the second revolution. On the contrary, it is apparent that the gloss change is suppressed by the temperature control of this embodiment.

[0068]

Note that in this embodiment, a film heating type that is high in temperature increase rate is shown as an example. In the case of using the heating means having a large heat capacity which requires time for temperature increase, the same effects as this embodiment can be obtained by switching over the target temperature earlier by the time required for the temperature increase.

[0069]

Further, power supplied to the ceramic heater 1b is changed between the first revolution and the second revolution or later to achieve the uniform heat supplying capacity of the fixing roller 1, producing the same effects.

[0070]

<Second Embodiment; Figs 7, 8 and 13>

Fig. 7 is a cross-sectional schematic diagram of the fixing apparatus 10 according to the second embodiment. The fixing apparatus 10 of this embodiment and the fixing apparatus 10 shown above in Fig. 1 are compared with each other, and have the

same structure except the positional difference of the thermistor 5 and the temperature control.

[0071]

In the case of the fixing apparatus 10 of this embodiment, as shown in Fig. 7, a film guide surface shape is provided to the heater holder 2c so as to form a film extended contact portion C1 in which the heating film 2a contacts the surface of the fixing roller 1 additionally on an upstream side of the ceramic heater 2b (heating nip N2) in the surface-heating unit 2 in a fixing roller rotating direction. That is, the heating film 2a is guided by the heater holder 2c, and contacts the fixing roller 1 in the heating nip N2 and in the film extended contact portion C1 on the further upstream.

[0072]

In addition, in the film extended contact portion C1 of the surface-heating unit 2, the thermistor 5 as the temperature detecting means is provided by being constantly abutted by a pressure spring or the like against a film surface of the heating film 2a opposite to the surface contacting the fixing roller 1, that is, a film inner surface (back surface) thereof.

[0073]

According to a temperature detecting method using the above arrangement, temperature decrease of

the fixing roller 1 due to the paper passing is reflected on the detection temperature, so that the power supplied to the ceramic heater 2b is easy to get feedback from the deviation from the target temperature. Thus, the heat supplying capacity of the fixing roller 1 can be further maintained uniform. [0074]

Fig. 8 shows the control according to this embodiment over the elapse of time, and indicates the target temperature and the power that is inputted to the ceramic heater 2b with the insertion of the recording material P in the fixing nip N1 set as a starting point. [0075]

In this embodiment, the thermistor 5 detects the temperature decrease before the heating nip N2 is reached by a portion of the fixing roller 1 that contacts the leading edge of the recording material P. In accordance with the detection, the control circuit increases the power supplied to the ceramic heater 2b to a certain degree. [0076]

Fig. 13 shows the control flow according to this embodiment. In this embodiment, at the time s1 when the heating nip N2 is reached by a portion of the fixing roller 1 that contacts the leading edge of the recording material P, the target temperature is

switched from $T_3 = 190^{\circ}\text{C}$ to $T_4 = 220^{\circ}\text{C}$, thereby
supplying a sufficient amount of heat to the fixing
roller 1. Thus, the heat supplying capacity with
respect to the recording material P can be maintained
5 even in the second revolution or later.

[0077]

Accordingly, similarly to the first embodiment,
the temperature of the recording material P after
discharging can be maintained constant, and the
10 decrease in gloss due to the revolution can be
suppressed.

[0078]

<Third Embodiment; Figs. 9, 10, and 14>

Fig. 9 is a cross-sectional schematic diagram
15 of the fixing apparatus 10 according to the second
embodiment. The fixing apparatus 10 of this
embodiment and the above fixing apparatus 10 shown in
Fig. 1 are compared with each other, and have the
same structure except the positional difference of
20 the thermistor 5 and the temperature control.

[0079]

That is, the fixing apparatus 10 of this
embodiment, the film guide surface shape is provided
to the heater holder 2c so as to form a film extended
25 contact portion C2 in which the heating film 2a
contacts the surface of the fixing roller 1 on a
downstream side of the ceramic heater 2b (heating nip

N2) in the fixing roller rotating direction. The heating film 2a is guided by the heater holder 2c, and contacts the fixing roller 1 in the heating nip N2 and in the film extended contact portion C2 on the further downstream. In addition, in the film extended contact portion C2 of the surface-heating unit 2, the thermistor 5 as the temperature detecting means is provided by being constantly abutted by a pressure spring or the like against the film surface of the heating film 2a opposite to the surface contacting the fixing roller 1, that is, the film inner surface (back surface) thereof.

[0080]

Fig. 14 shows the control flow according to this embodiment. In this embodiment, the thermistor 5 is disposed on the downstream side of the ceramic heater 2b as the heating source in the film rotating direction, so that the thermistor 5 detects the heating state of the ceramic heater 2b with a high responsiveness. Accordingly, the stability (convergence) of the feedback control can be improved.

[0081]

On the other hand, at the time s1 when the heating nip N2 is reached by the portion of the fixing roller 1 that contacts the leading edge of the recording material P, the thermistor 5 cannot detect its temperature decrease. At this timing, the target

temperature is changed from $T5 = 180^{\circ}\text{C}$ to $T6 = 200^{\circ}\text{C}$.
Note that the timing can be accurately predicted
based on the time taken for the recording material P
to reach the fixing apparatus 10 since the paper
5 feeding. Further, at the time $s3$ when the thermistor
5 is reached by the portion of the fixing roller 1
that contacts the leading edge of the recording
material P, the target temperature is changed to $T7 =$
 230°C , thereby maintaining the heat supplying
10 capacity of the fixing roller 1.

[0082]

It is preferable to set $T7$ such that the
temperature of the recording material P after
discharging in the first revolution is the same as
15 that in the second revolution or later. $T6$ is a
temperature between $T5$ and $T7$, and is set such that
the power supply is rapidly performed with the target
temperature difference between $T5$ and $T6$ in
consideration of the rising time due to the PID
20 control.

[0083]

Fig. 10 shows the control according to this
embodiment over the elapse of time, and indicates the
target temperature and the power that is inputted to
25 the ceramic heater 2b with the insertion of the
recording material P in the fixing nip $N1$ set as a
starting point.

[0084]

According to the above temperature control, the surface temperature of the fixing roller 1 in the second revolution or later is increased, so that the heat supplying capacity with respect to the recording material P in the first revolution and the second revolution or later can be made uniform. Accordingly, image non-uniformity such as uneven gloss can be eliminated.

10 [0085]

<Others>

a) The fixing roller 1 as the rotary member for heating is not limited to the roller member, but a pivoting belt member can be used instead.

15 [0086]

b) The surface-heating unit 2 as the heating source is not limited to the ceramic heater 2b. For example, a PTC (Positive Temperature Coefficient) heater, a heat generating member of an electromagnetic induction, or the like can also be used. Also, as the ceramic heater 2b, a metal plate whose surface has been insulated can be used instead of a ceramic insulating substrate.

[0087]

25 As the heating film 2a, a film made of metal can also be used. In addition, by forming the film made of metal itself as the heat generating member of

an electromagnetic induction, the structure for generating heat by exciting means can be obtained.

[0088]

As the surface-heating unit 2, a heating member
5 of a non-contact type such as an infrared lamp device can also be used.

[0089]

c) As to the pressure roller 3 as a pressing rotary member according to the first embodiment to
10 the third embodiment, a pressure film unit composed of an endless belt and a pressure member, which is disclosed in Japanese Patent Application Laid-open No. 2001-228731, may be used instead of the pressure roller to achieve a smaller heat capacity.

15 [0090]

d) The heating apparatus according to the present invention is not limited to an image heating and fixing apparatus according to the embodiments, but may be widely used as means or an apparatus for
20 heating a heating material such as: an image heating apparatus for heating a recording material bearing an image to reform surface properties including gloss, an image heating apparatus for temporary fixing, a heating and drying apparatus for a heating material,
25 and a heat laminating apparatus.

[0091]

Hereinabove, description has been made of the

present invention by showing various examples and
embodiments. However, it can be understood by one
skilled in the art that the gist and the scope of the
present invention are not limited to the specific
5 descriptions and drawings in this specification, but
include all various modifications and variations
described in the scope of the claims appended hereto.
Examples of embodiments of the present invention are
listed hereinbelow.

10 [0092]

[Embodiment 1]

A heating apparatus for heating a material to
be heated, the material being inserted in a nip to be
nipped and conveyed therein using heat of a rotary
15 member, including: a rotary member; an opposing
member forming a nip with respect to said rotary
member; a heating member for heating another portion
other than the nip in a surface of said rotary
member; and temperature control means for controlling
20 a temperature of the rotary member heated by said
heating member, in which after insertion of the
material to be heated in the nip starts, the
temperature control means raises a control
temperature of said heating member before the
25 completion of one revolution of rotary member.

[0093]

[Embodiment 2]

A heating apparatus according to embodiment 1, in which the temperature control means decrease the control temperature of said heating member before completion of discharge of the material to be heated
5 from the nip.

[0094]

[Embodiment 3]

A heating apparatus according to embodiment 1 or 2, in which after insertion of the material to be
10 heated in the nip starts, said temperature control means raises the temperature of said heating member within L/V , where L is the distance from the nip to the portion of the rotary member surface to be heated by the heating member along the rotating direction of
15 said rotary member, and V is the tangential speed for rotation of said rotary member.

[0095]

[Embodiment 4]

A heating apparatus for heating a material to
20 be heated, the material being inserted in a nip to be nipped and conveyed therein using heat of a rotary member, including: the rotary member; an opposing member forming a nip with respect to said rotary member; a heating member for heating another portion
25 other than the nip in a surface of said rotary member; and temperature control means for controlling a temperature of the rotary member heated by said

heating member, in which after insertion of the material to be heated in the nip starts, the temperature control means increases the power supplied to said heating member before the completion
5 of one revolution of rotary member.

[0096]

[Embodiment 5]

A heating apparatus according to embodiment 4, in which the temperature control means decreases the
10 power supplied to said heating member before completion of discharge of the material to be heated from the nip.

[0097]

[Embodiment 6]

15 A heating apparatus according to embodiment 4 or 5, in which after insertion of the material to be heated in the nip starts, said temperature control means increases the power supplied to said heating member within L/V , where L is the distance from the
20 nip to the portion of the rotary member surface to be heated by the heating member along the rotating direction of said rotary member, and V is the tangential speed for rotation of said rotary member.

[0098]

25 [Embodiment 7]

A heating apparatus according to any one of embodiments 1 to 6, in which said heating member

heats a surface of said rotary member through a film,
and in which said temperature control means includes
temperature detecting means in contact with a film
surface opposite to another film surface contacting
5 said rotary member in a portion in which the film is
in contact with the surface of said rotary member.

[0099]

[Embodiment 8]

A heating apparatus according to embodiment 7,
10 in which said temperature detecting means is disposed
in the portion in which the film is contact with the
surface of said rotary member on an upstream side in
a rotating direction of said rotary member.

[0100]

15 [Embodiment 9]

A heating apparatus according to embodiment 7,
in which said temperature detecting means is disposed
in the portion in which the film is in contact with
the surface of said rotary member on a downstream
20 side in a rotating direction of said rotary member.

[0101]

[Embodiment 10]

A heating apparatus according to any one of
embodiments 1 to 6, in which the heating member
25 includes a ceramic heater as a heating source, and in
which the temperature detecting means that is
included in the temperature control means is disposed

to a back surface of the ceramic heater.

[0102]

[Embodiment 11]

A heating apparatus according to any one of
5 embodiments 1 to 10, in which the opposing member is
a rotary member.

[0103]

[Embodiment 12]

A heating apparatus according to any one of
10 embodiments 1 to 11, in which said material to be
heated is a recording material bearing an image.

[0104]

[Embodiment 13]

An image forming apparatus, including: image
15 forming means for forming an unfixed toner image on a
recording material so as to be borne thereon; and
fixing means for heat-fixing the unfixed toner image
on the recording material to the recording material,
in which said fixing means is a heating apparatus
20 according to any one of embodiments 1 to 12.

[0105]

[Effect of the Invention]

As described above, according to the present
invention, in a heating apparatus of the surface-
25 heating type, the rotary member that receives heat
supply of a surface-heating type by the heating
member in a portion of the rotary member surface

other than the nip for heating the inserted heating material, after the insertion of the heating material in the nip starts, the control temperature of the heating member for heating the rotary member is
5 increased before the rotary member rotates by one revolution. Accordingly, heat supplying capacity of the rotary member with respect to the heating material can be maintained constant.

[0106]

10 The control temperature of the heating member is decreased before the discharging of the heating material from the nip completes, that is, the control temperature of the heating member is recovered before discharging the heating material. Accordingly, while
15 the heating material is not inserted, the temperature of the rotary member can be prevented from increasing.

[0107]

According to the above actions, there can be provided an image forming apparatus in which image
20 non-uniformity such as uneven gloss is not generated even if the heating apparatus is used as an energy-saving fixing apparatus with shorter rising time.

[Brief Description of the Drawings]

[Fig. 1]

25 Fig. 1 is a cross-sectional schematic diagram of a fixing apparatus according to a first embodiment.

[Fig. 2]

Fig. 2 is a structural diagram showing an outline of an image forming apparatus according to the first embodiment.

[Fig. 3]

5 Fig. 3 is a diagram showing control according to the first embodiment.

[Fig. 4]

Fig. 4 is a model diagram showing a phenomenon that occurs in the first embodiment.

10 [Fig. 5]

Fig. 5 is a diagram showing a recording material temperature after discharging according to a comparative example.

[Fig. 6]

15 Fig. 6 is a diagram showing a recording material temperature after discharging according to the first embodiment.

[Fig. 7]

20 Fig. 7 is a cross-sectional schematic diagram of a fixing apparatus according to a second embodiment.

[Fig. 8]

Fig. 8 is a diagram showing control according to the second embodiment.

25 [Fig. 9]

Fig. 9 is a cross-sectional schematic diagram of a fixing apparatus according to a third embodiment.

[Fig. 10]

Fig. 10 is a diagram showing control according to the third embodiment.

[Fig. 11]

5 Fig. 11 is an operation bar chart of an image forming apparatus.

[Fig. 12]

Fig. 12 is a diagram showing a control flow of the image forming apparatus according to the first
10 embodiment.

[Fig. 13]

Fig. 13 is a diagram showing a control flow of an image forming apparatus according to the second embodiment.

15 [Fig. 14]


Fig. 14 is a diagram showing a control flow of an image forming apparatus according to the third embodiment.

[Description of Reference Numerals or Symbols]


20	1	fixing roller
	2a	heating film
	2b	ceramic heater
	2c	heater holder
	3	pressure roller
25	5	temperature detecting means

Name of the Document
【書類名】 図面—Drawings


【図 1】 FIG. 1

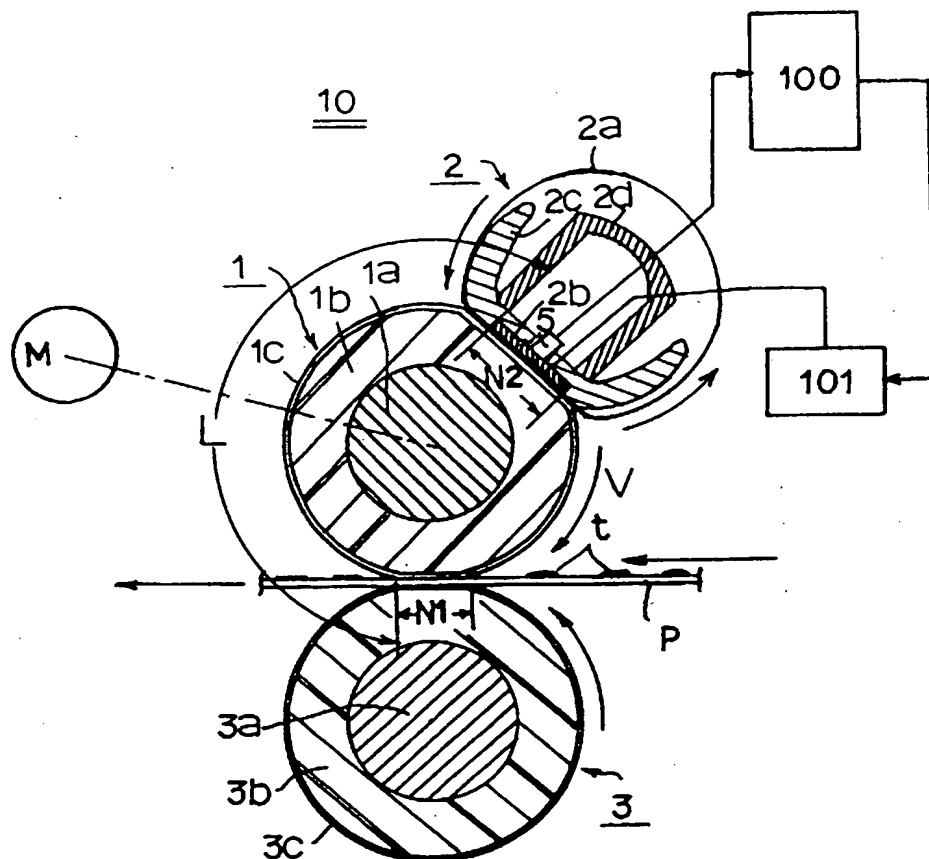


【図 2】 FIG. 2

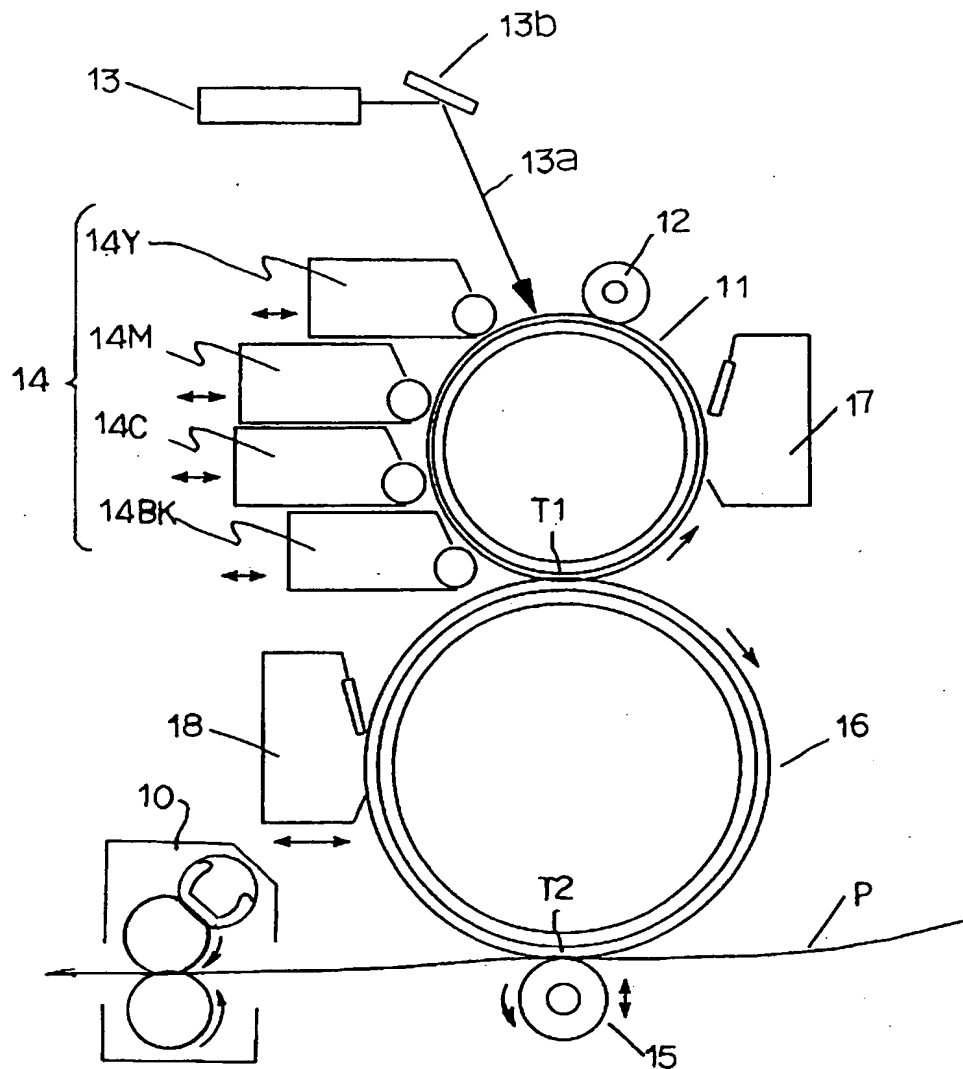


【図3】 FIG. 3
INSERTING AND DISCHARGING TIMING OF
RECORDING MATERIAL

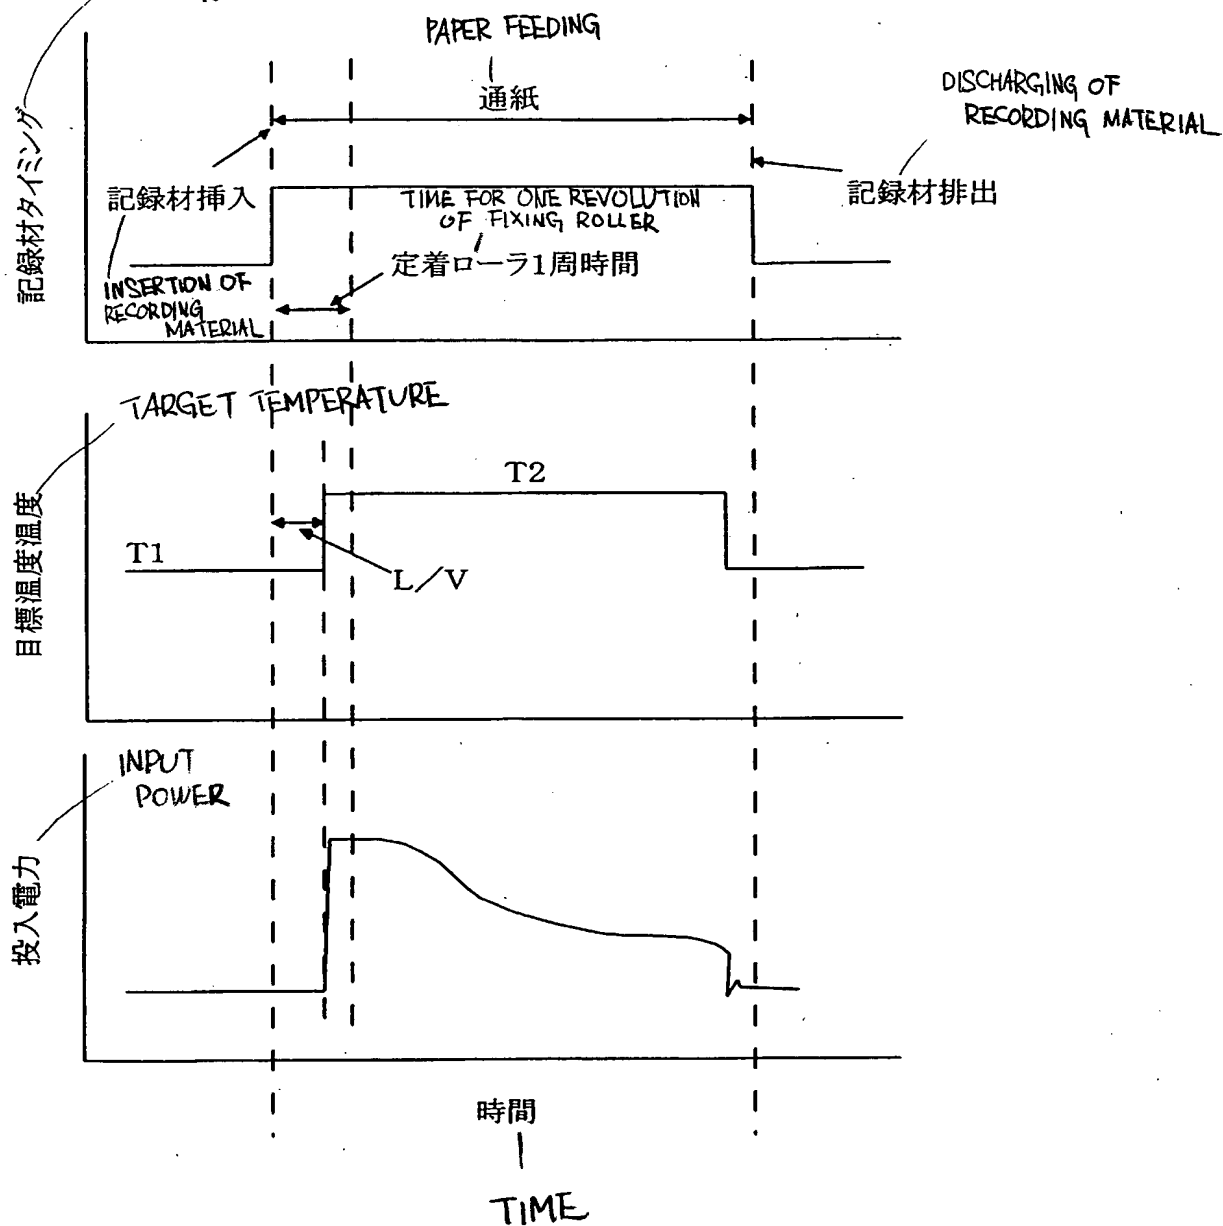


【図4】 FIG. 4

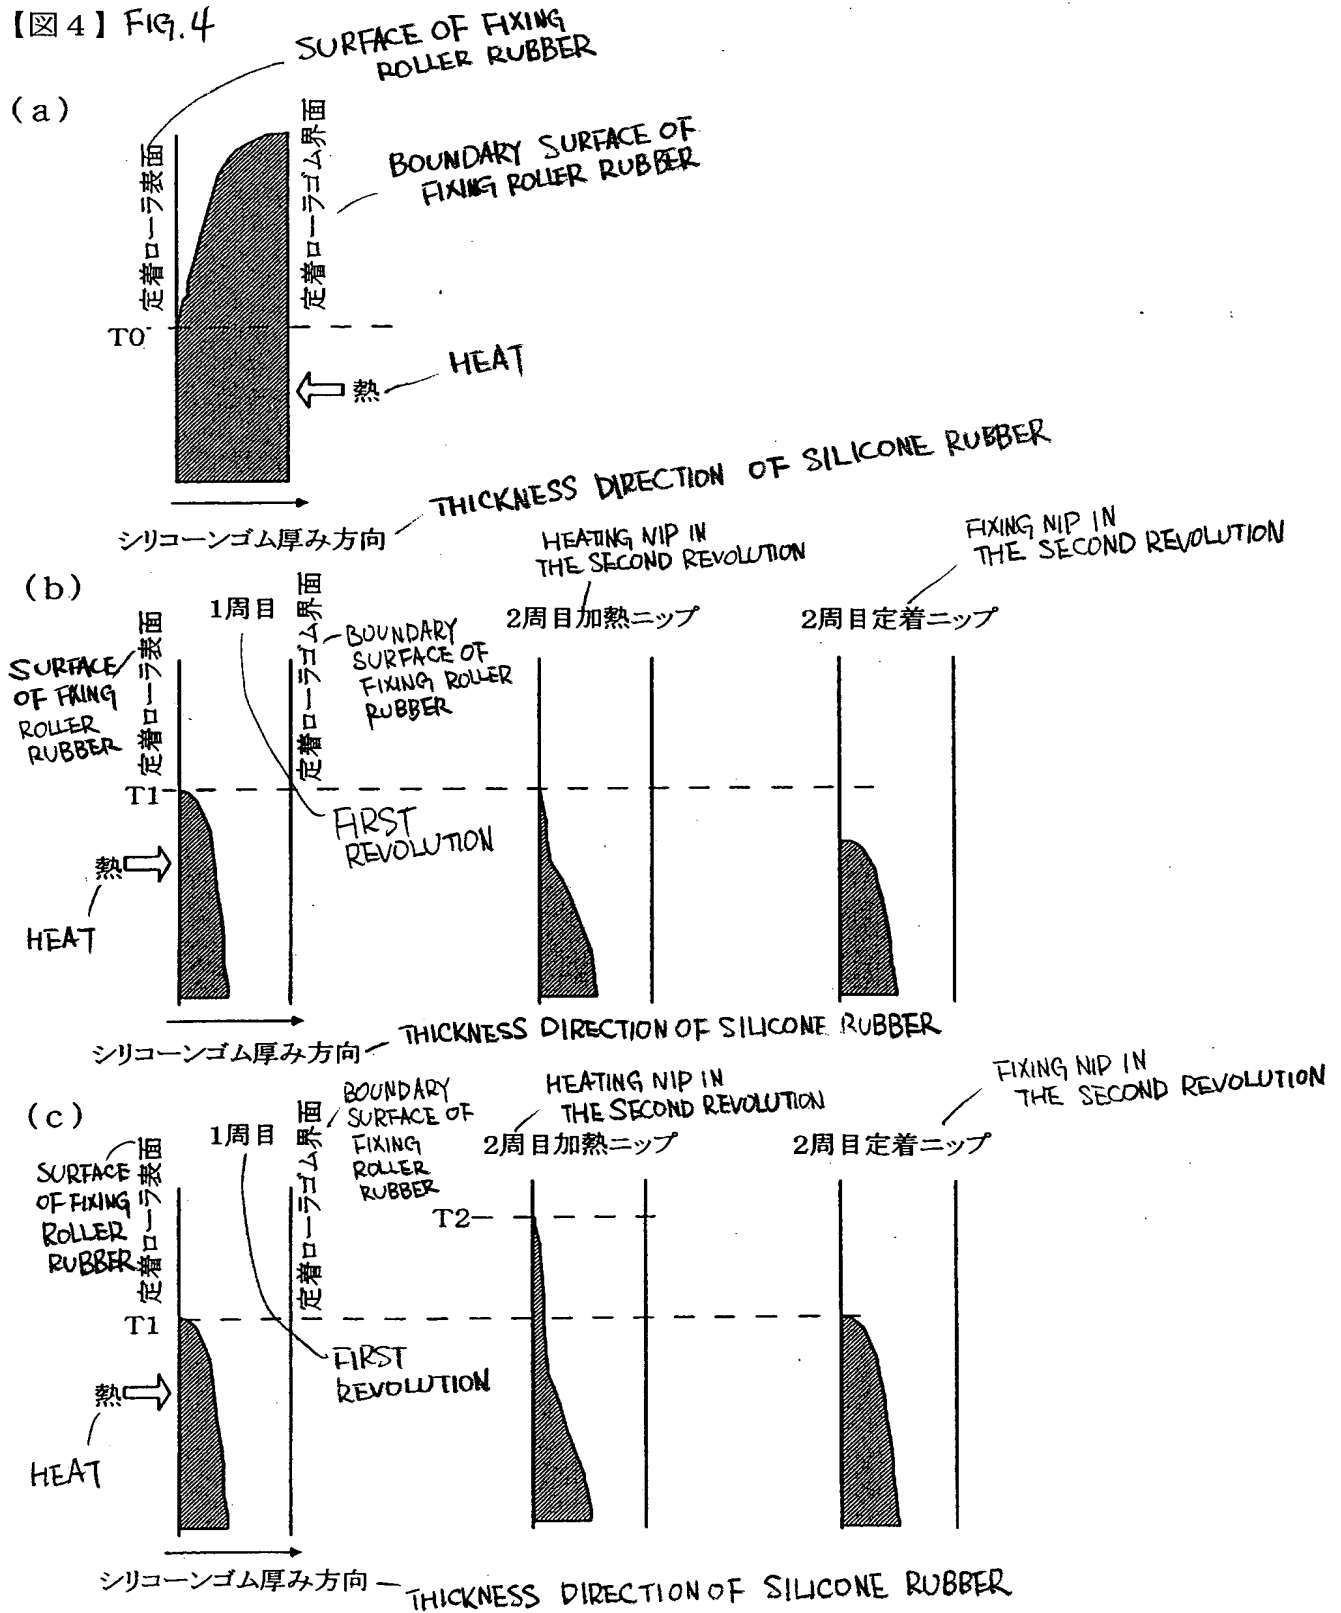


【図5】 FIG. 5

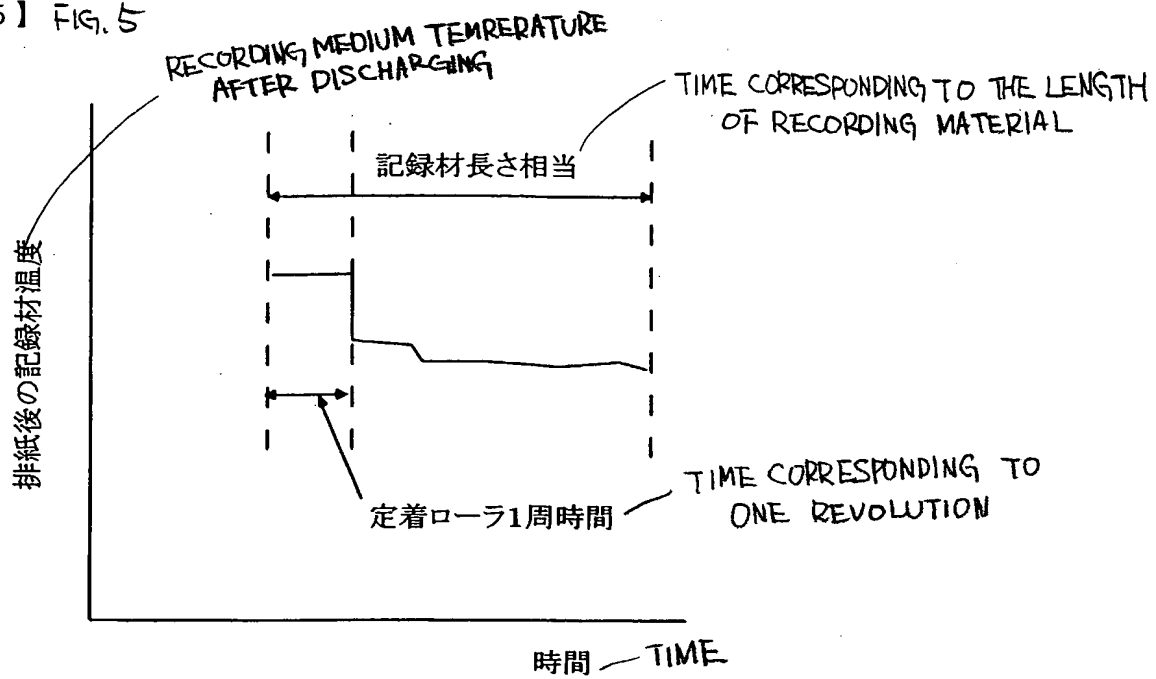


【図6】 FIG. 6

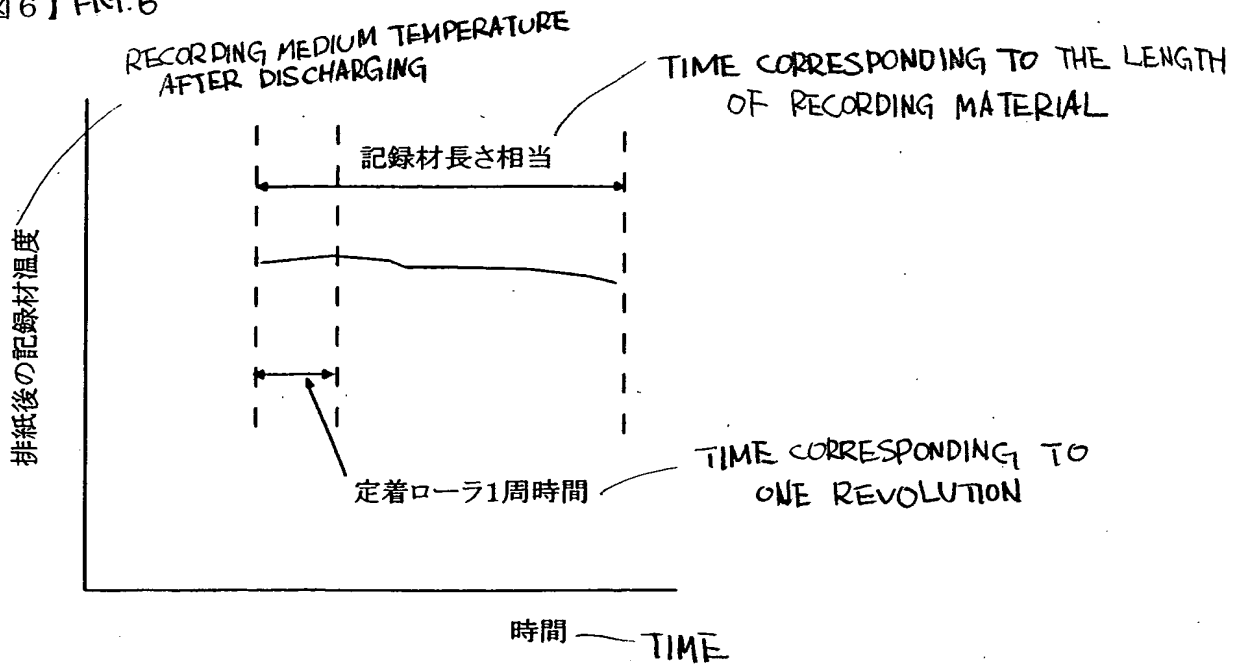


【図7】 Fig. 7

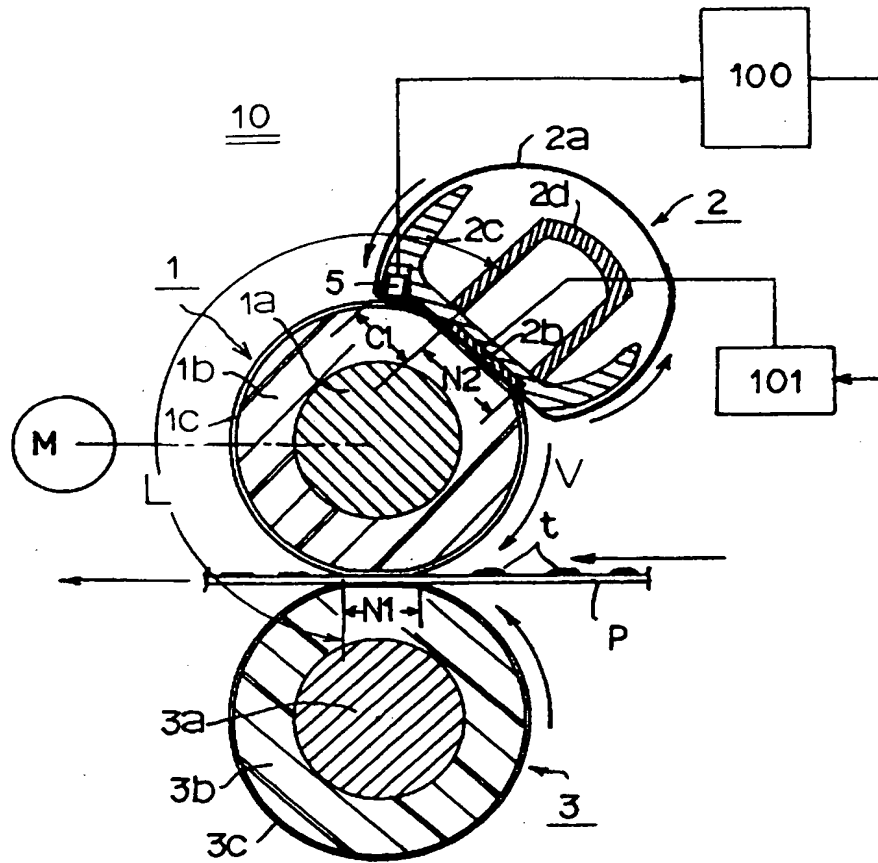


【図8】 FIG. 8

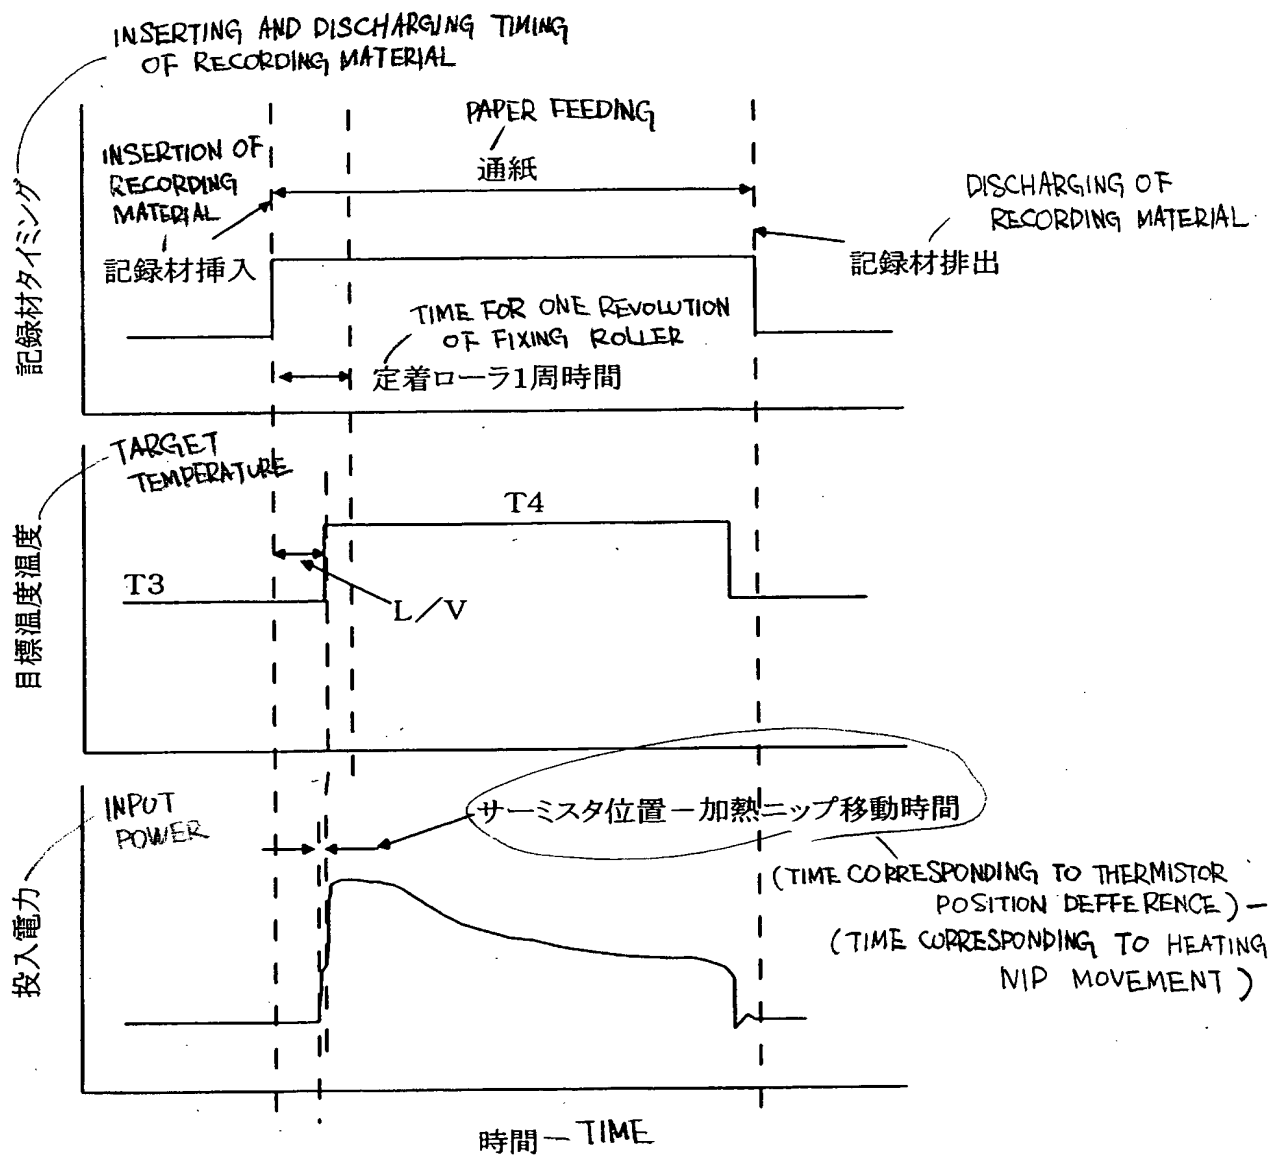


【図10】FIG. 10

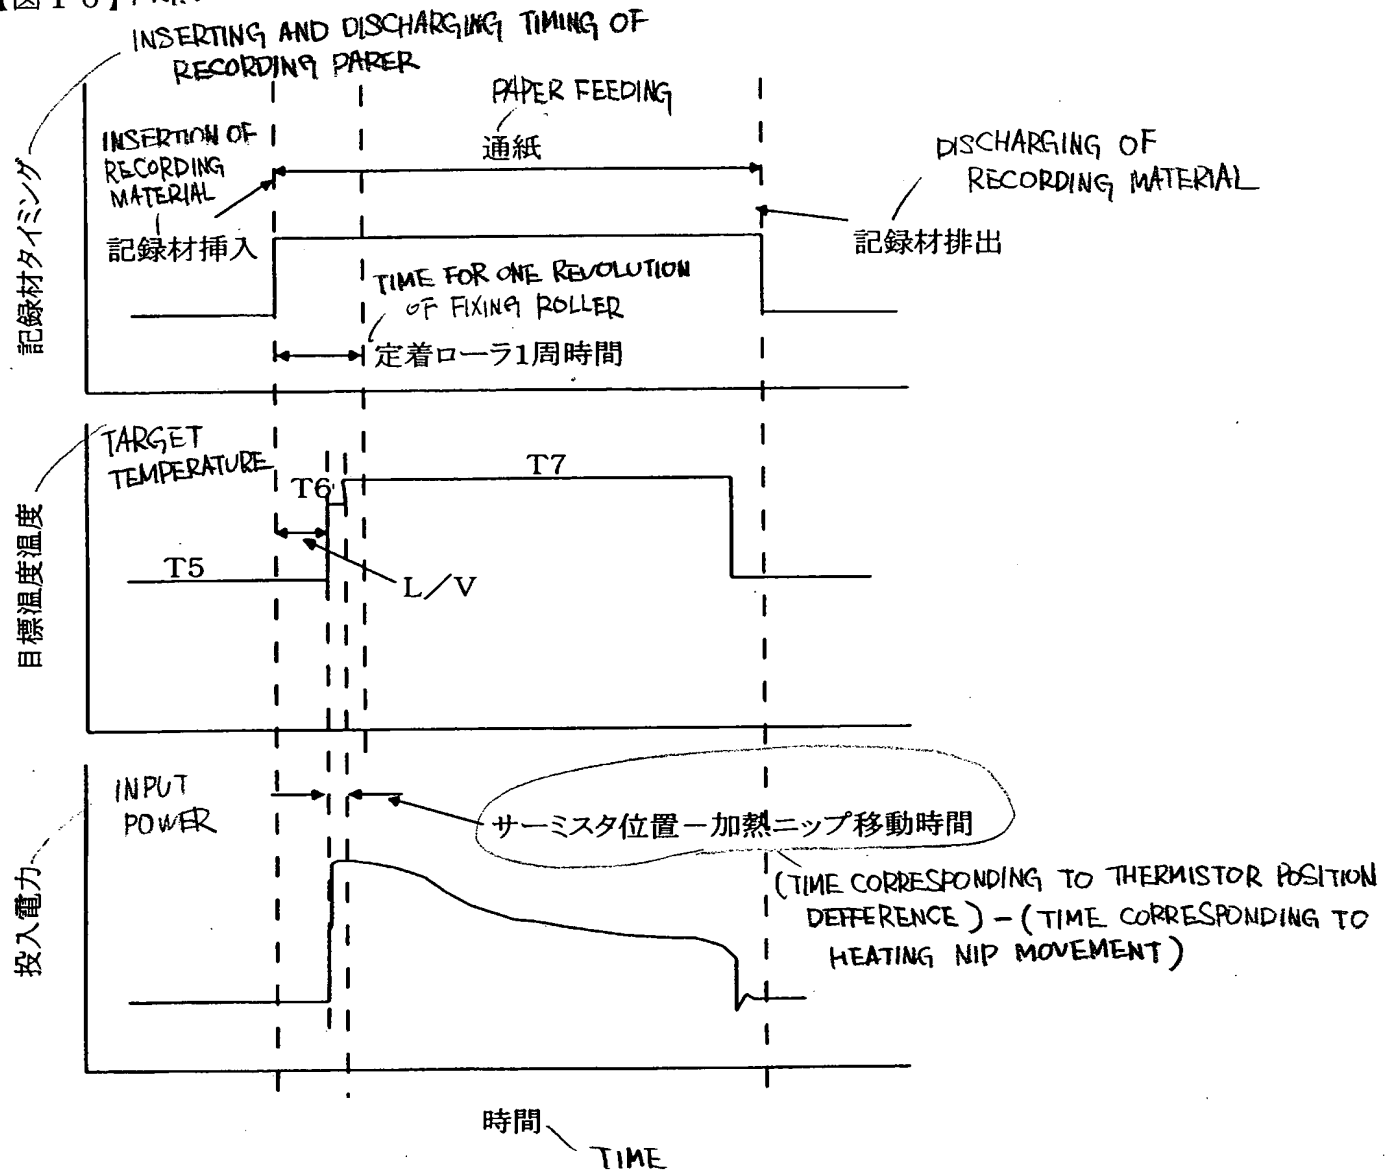


【図11】 FIG. 11

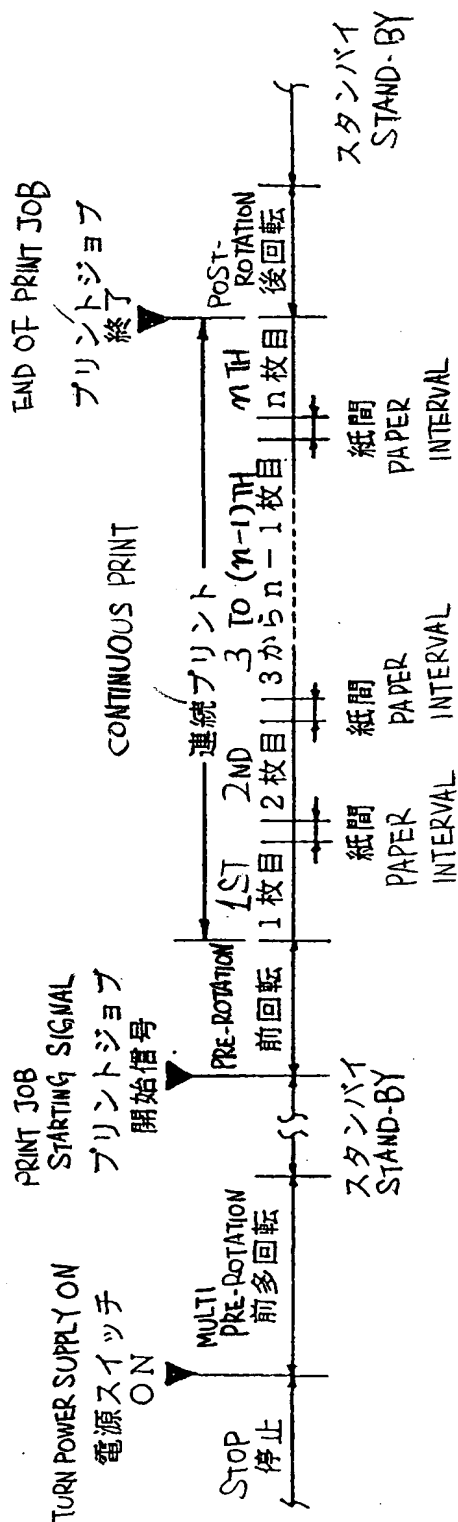


【図12】 Fig. 12

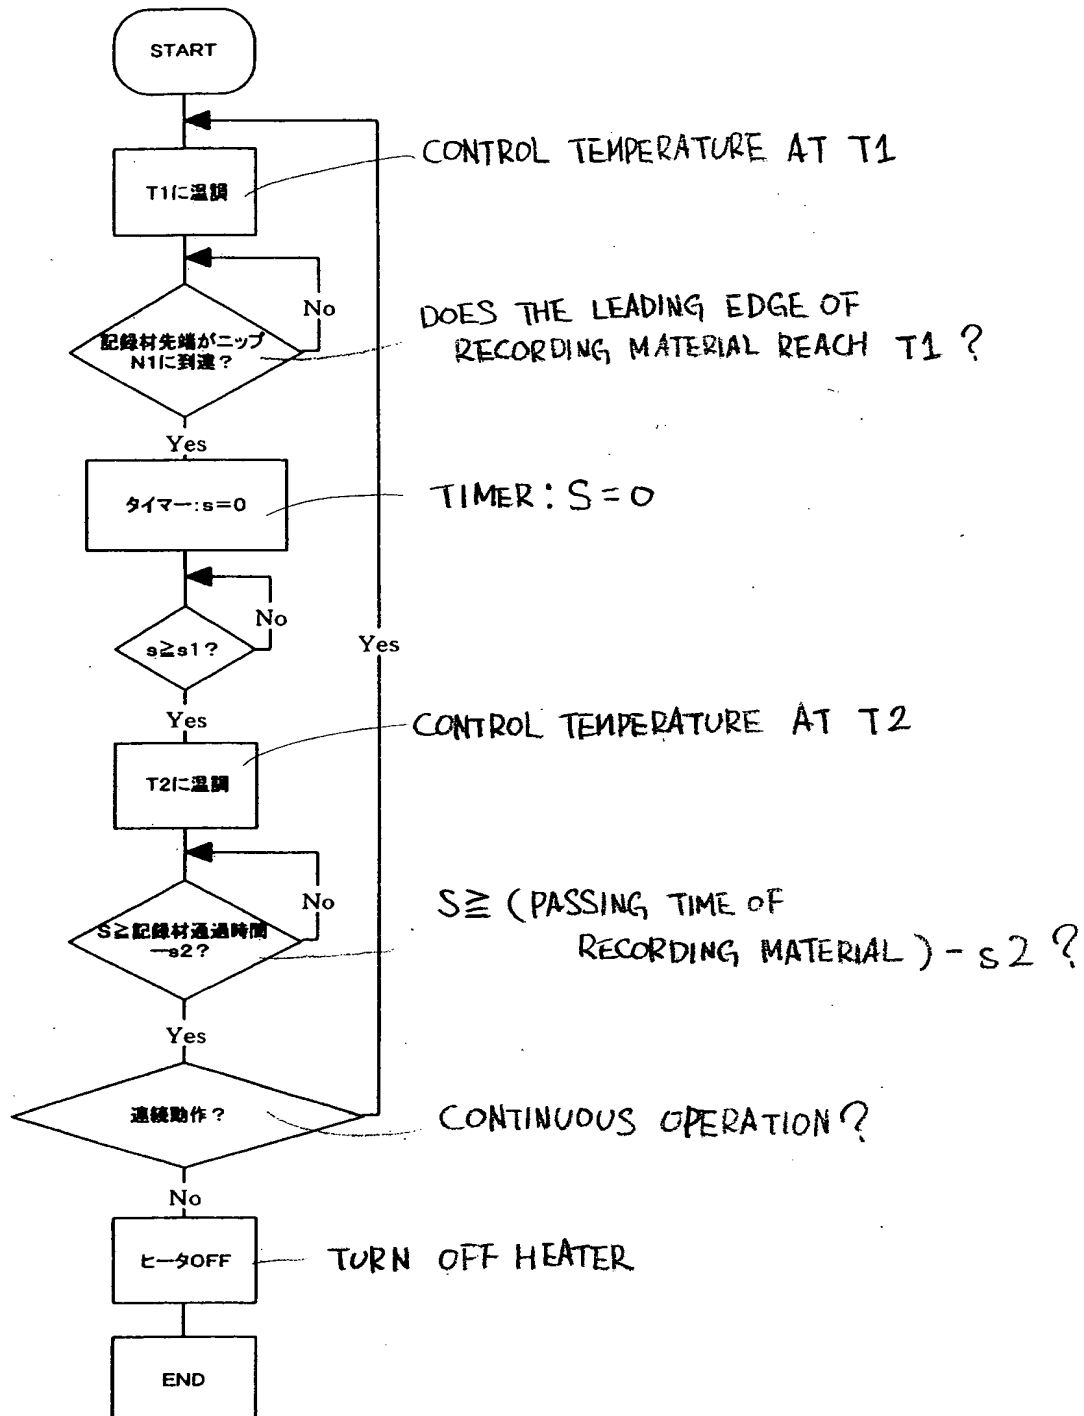

【図13】 FIG. 13

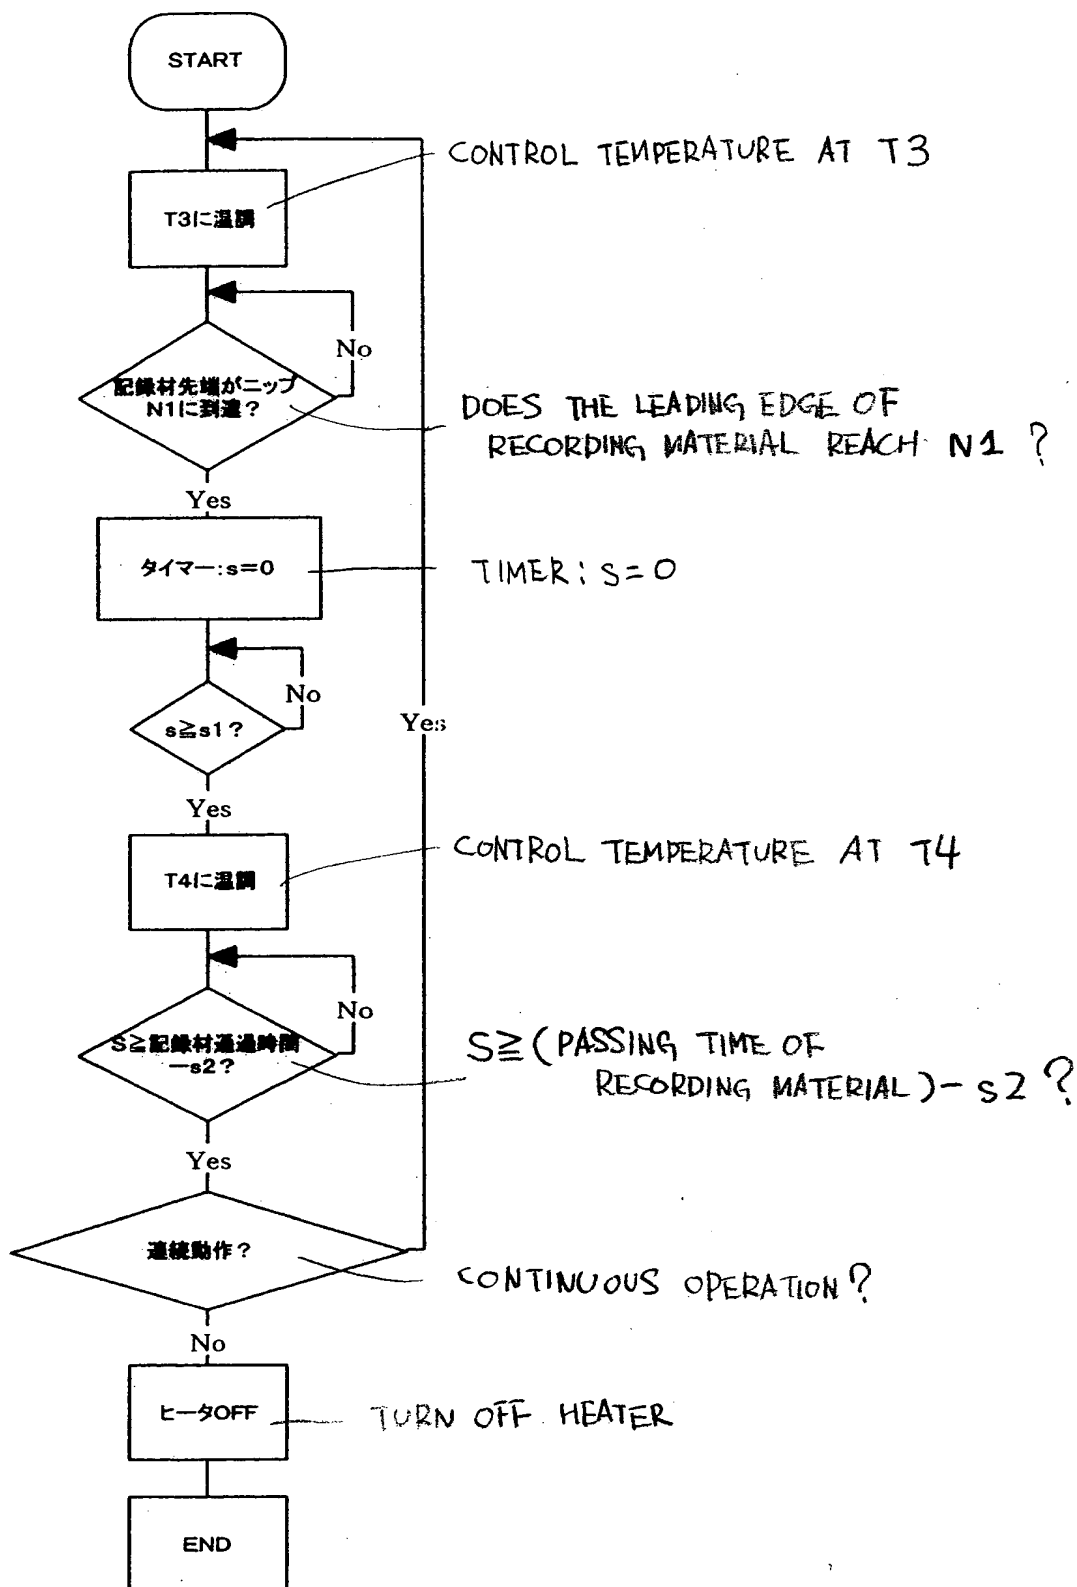

【図14】 FIG. 14

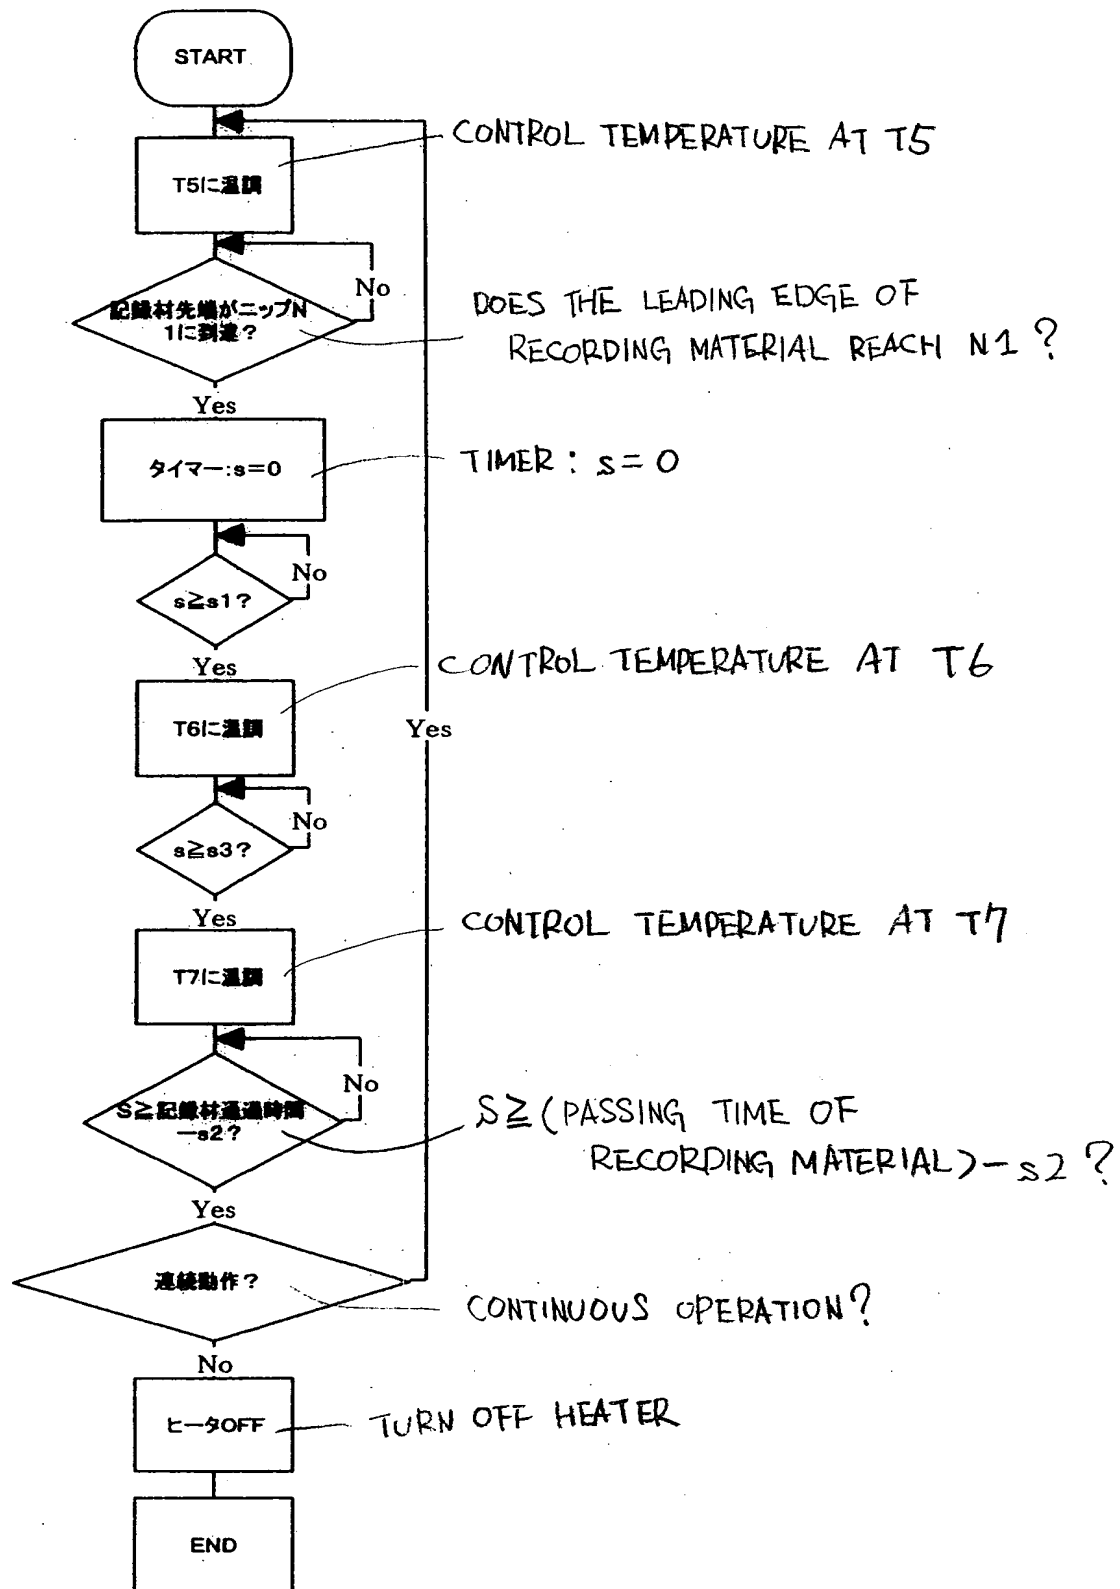

[Name of the Document] Abstract

[Abstract]

[Object]

An object is to prevent an uneven heating
5 phenomenon of the heating material in the first
revolution and the second revolution or later in a
heating apparatus of a surface-heating type, and to
prevent uneven gloss caused by the uneven heating
phenomenon in the fixing apparatus.

10 [Means for Achieving the Object]

A heating apparatus 10 for heating a material
to be heated P inserted in a nip N1 to be nipped and
conveyed therein using heat of a rotary member 1,
including: the rotary member 1; an opposing member 3
15 that forms the nip N1 with respect to the rotary
member 1; a heating member 2 for heating a portion of
a rotary member 1 surface N2 other than the nip N1;
and temperature control means 5, 100, and 101 for
controlling temperature used for heating the rotary
20 member by the heating member 2, in which after
insertion of the material to be heated in the nip N1
starts, the temperature control means 5, 100, and 101
increases the temperature of the heating member 2
before the rotary member 1 rotates by one revolution.

25 [Selected Drawing]

Fig. 1

2003-039967

Applicant's Information

Identification No. [000001007]

1. Date of Change: August 30, 1990

(Reason of Change) New Registration

Address: 3-30-2, Shimomaruko, Ohta-ku, Tokyo

Name: CANON KABUSHIKI KAISHA

2004-3017681